

Ved installasjon i utsatte områder som maskinrom, verksteder, lagerrom o.l. gjøres tilkoblingene til dektorene dryppsikre ved hjelp av underlagsboks type BWP-40B. Underlagsboksen har pakknippel-innføringer. BWP-40B leveres standard med nippel type skintop M20 x 1.5.

Kun for detektorer som benytter sokkel BWA-40A/1.

**Utførelse:**  
BWP-40B : Standard

*On installations in rough areas like engine rooms, work shops, store houses etc., the detector terminals are made drip-proof by using conduit box BWP-40B. The conduit box has packtight cable entries. Standard glands are of type skintop M20 x 1.5.*

*To be fitted with detectors types using socket BWA-40A/1.*

**Versions:**  
BWP-40B : Standard



# Tekniske data/Technical data: BWP-40B

Beskyttelsesgrad /  
Degree of protection : IP44 (IEC 529)

Dimensjoner / Dimensions : Ø126 x H46,8

Farge / Colour : Lys grå / Light Grey

Materiale / Material : Selvslukkende  
polycarbonat/  
Self extinguishing  
polycarbonate


Beskyttelsesgrad /  
Degree of protection : IP 44 with detectors  
mounted.

Vedlikehold / Maintenance: Ingen / None

Service / Service: Detektorer skiftes ved feil /  
Replace if faulty.

Godkjenning /  
Approval : See Autronica document  
"Type Approvals" Appro/M-E.

Dimensjoner og tilkobling /  
Dimensions and connection.

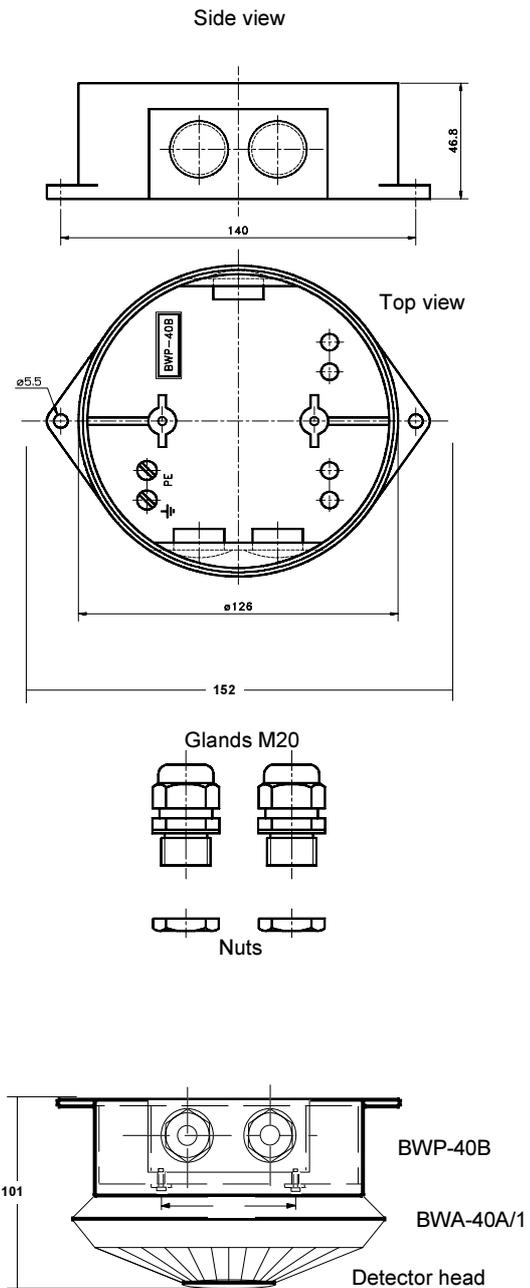

Med forbehold om endringer uten forutgående varsel/Subject to changes without notice

Autronica Fire and Security AS

Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01.

Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 99.

Autronica Industrial Ltd., Watford, United Kingdom. Phone: 1923 23 37 68, fax: 1923 22 55 77.