


LPM 40-A

6126.2

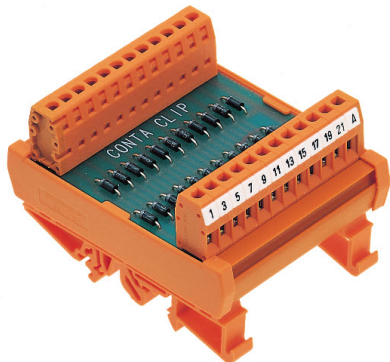

Lamp test module, With 40 channels, Common cathode with common collection point, Diode type 1N 4007, Screw connection, Mounting type: Mounting rail TS 35

Commercial

General

Accessories: Without cover

Country of origin: NL

Customs number: 85411000

GTIN (EAN): 4044211072209

Packaging unit: 1

Product description: Lamp test module

Quantity unit: PC

Unit of weight: G

Weight per piece (including packaging): 436.7g

Weight per piece (not including packaging): 316.1g

Technical

Dimensions

Height TS 35/7.5: 57mm

Length: 87mm

Width: 216mm

Ratings

Contamination degree: 2

Overvoltage category: III

Connection data

Connection principle: Screw connection

Stripping length: 7mm

Torque: 0.6Nm

Wire cross-section single core (rigid), min.: 0.2mm²

Wire cross-section single-core (rigid), max.: 4mm²

Wire cross-section stranded with wire-end ferrules, max.: 2.5mm²

Wire cross-section stranded with wire-end ferrules, min.: 0.2mm²

Wire cross-section stranded, max.: 2.5mm²

Wire cross-section stranded, min.: 0.2mm²

Input data

Current load per channel, max.: 1A

Max. operating voltage AC/DC: 250V

Number of channels: 40

Shared anode: ✓

Materials

Working temperature, max.: 50°C

Working temperature, min.: -20°C

Approvals

Standards and regulations

CE directives and standards: Low-Voltage Directive 2014/35/EU, in compliance with EN 61010-1 and EN 62477-1
EMC Directive 2014/30/EC, in compliance with EN 55011 and EN 61326-1

Standards / specifications: DIN VDE 0110 / EN 50178

UKCA guidelines and standards: Electrical Equipment (Safety) Regulations 2016 (S.I. 2016/1101), in compliance with EN 61010-1 and EN 62477-1

EMC Regulations 2016 (S.I. 2016/1091), in compliance with EN 55011 and EN 61326-1

Environment

Environmental Product Compliance

EU-POP Conform: Yes

PROP 65 Conform: Yes

REACH Candidate Substance Note: No

REACH Conform: Yes

REACH Reference date: 2026-02-04

RoHS Conform: Yes

TSCA Conform: Yes
